



EO GENIUS 2

The charger that makes switching to electric a business advantage.



FEATURES

Power: Up to 22kW charging, perfect for overnight commercial or depot charging (single-phase or three-phase options).

OCPP 1.6 compliant: Back-office agnostic, ready for open OCPP integration and additional security extensions.


Always connected: Wi-Fi, Bluetooth or Cat 5 Ethernet as standard. 4G cellular as optional extra.

Multiple load management options available: Distribute site power across your chargers using multiple local or automatic load management options.

Included extras: Built-in RFID reader and RFID cards available. Integrated MID meter to unlock billing options.

CSMS Integration

Connect Genius 2 to Charging Station Management System (CSMS) for enhanced insights, energy usage analysis, charge scheduling, telematics integration and more.

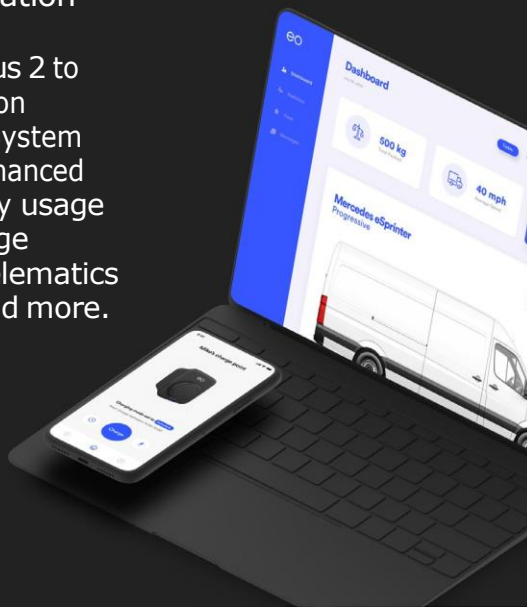

TECH SPECS

Dimensions:
330mm (h) x 220 mm (w) x 170mm (d)

Connection types: Universal Type 2 socket or tethered Type 2 cable.

Protection: DCL (Direct Current Leakage) included for applicable markets.

Durable: Impact, water and dust resistant with IP54 (socketed), IP56 (tethered) and IK08 protection ratings.